

Combo

ELECTRONIC PUMP UNIT



**START
ELEVATOR**
OLEODINAMIC COMPONENTS FOR LIFTS

Combo/Combo AE



- Easy to install with pre-wired system
- Power unit with HSe technology
- BAG control pannel
- Racommanded for the refurbishment thanks to customized solutions
- Possibility to reduce the install power thanks to hight efficiency motor
- Reduce energy consumption
- No encoder to be installed in the lift shaft




Opzioni

- Start-up with inverter with management of input power
- Ecological Fluid
- Cabinet B2T compliant to EN 81-50
- WI-FI connection for the management of the HSE valve

BEG
www.begsrllift.com

Combo Technical Characteristics

Tank	Motors Kw	Flow range Lt/min	Valve
93/02A SL	3 -20	20 – 250	Hse 250

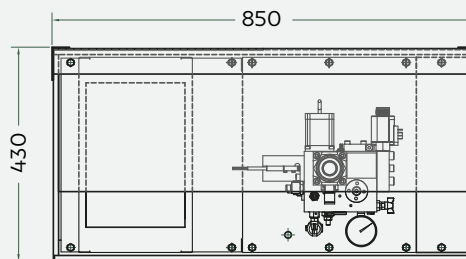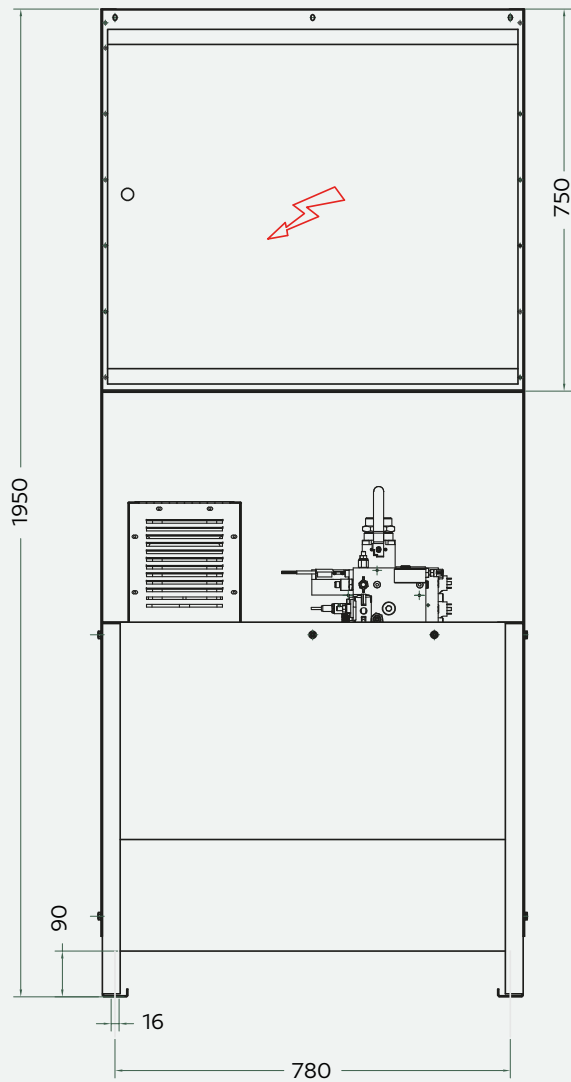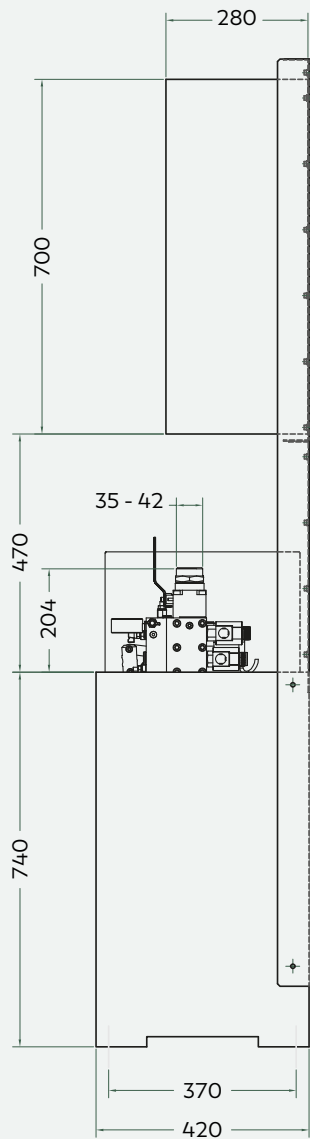

Combo AE Technical Characteristics

Tank	Motors Kw	Flow range Lt/min	Valve
93/02A SL	3 -11	20 – 205	Hse 250



START ELEVATOR SRL

29010 Incrociata di Calendasco (PC) - ITALIA
Tel. 0039 0523 771131 - 772774
Fax 0039 0523 771632

www.startelevator.it
startelevator@startelevator.it